

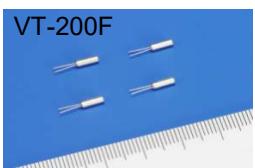


◆ Specification for Quartz Crystal

	VT-200F	SC-32S
Nominal Frequency	32.768kHz	32.768kHz
Frequency Tolerance	$+/-20 \times 10^{-6}$	$+/-20 \times 10^{-6}$
Load capacitance : CL	6pF/12.5pF	6pF~12.5pF
Motional Resistance : R1	50kΩmax	70kΩmax
Absolute Maximum Drive Level	1.0μW max	1.0μW max
Dimensions (Thickness: Max.Value)	ϕ 2	3.2×1.5×0.85mm

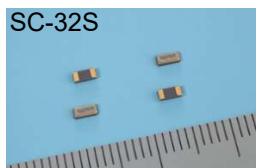


RECOMMENDED SOLDERING PATTERN

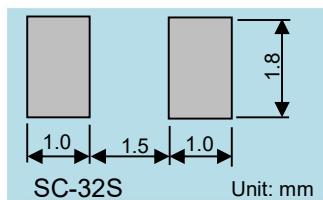


Please contact us for another circuit matching data.

◆ Qualification item for Oscillation circuit characteristics

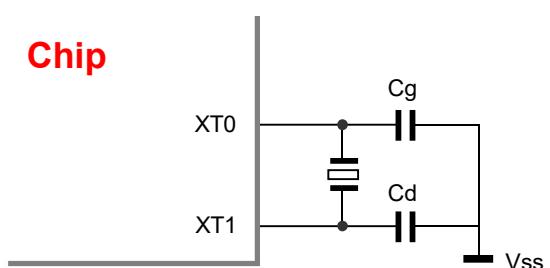

No	Items	Symbol	Recommendation
1	Negative Resistance	RL	
2	Oscillation allowance	M	more than 5 times of R1Max
3	Absolute Maximum Drive Level	D.L	SC-32S: 1 μ W VT-200F: 1 μ W

◆ Approximate expression for Circuit load capacitance

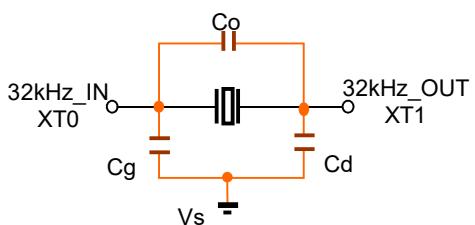

$$CL = Cg \times Cd / (Cg + Cd) + Cs \text{ (pF)}$$

Cos : 32kHz_IN-32kHz_OUT Stray capacitance

Cgs : 32kHz_IN-Vss Stray capacitance

Cds : 32kHz_OUT-Vss Stray capacitance

◆ Notes for the design of Circuit board

Please keep the wiring short and place Quartz Crystal, Condensor, and Resistance close as possible to Lapis microcontroller. In order to prevent interference with other signal lines, do not provide other signal lines, please do not provide other signal lines on the crystal mounting part (bottom surface).

◆Circuit matching constant for Oscillation circuit

Oscillation mode	32kHz Quartz crystal			External condensor		Oscillation Characteristics			Supply Vdd(V)
	Product	R1Max. (kΩ)	CL (pF)	Cg (pF)	Cd (pF)	RL (kΩ)	M (Times)	D.L. (μW)	
Tough mode	SC-32S	70	6	11	11	-1,064	15	0.01	3.3
	VT-200F	50	12.5	10	10	-1,164	17	0.01	3.3
Normal mode	SC-32S	70	6	22	22	-427	9	0.04	3.3
	VT-200F	50	12.5	9	9	-734	5	0.03	3.3
Low current consumption mode	SC-32S	70	6	22	22	-257	7	0.01	3.3
	VT-200F	50	6	9	9	-514	10	0.01	3.3

◆Notes

The above evaluation results are reference values evaluated in the specific sample, and the contents are not guaranteed.

Please note that in the actual circuit board, the value of the external element capacitance and the characteristics may change depending on the difference in stray capacitance and so on.